




CALIBRATION CERTIFICATE

TYPE : SB8-200kg C3-s	CAPACITY : 200kg
<u>RATED OUTPUT</u>	SERIAL NUMBER : 13353913
@ 200kg : 2.00017mV/V	
NON-LINEARITY : -0.001% OF R.O.	HYSTERESIS : 0.002% OF R.O.
CREEP @ 5 MIN : < +0.010 % OF R.O.	mV/V/ohm CLASSIFICATION : F

<u>TERMINAL RESISTANCE</u>	<u>INSULATION RESISTANCE</u>
INPUT : 388.15Ω	BRIDGE TO ELEMENT > 10GΩ
OUTPUT : 350.86Ω	BRIDGE TO SHIELD > 10GΩ
BRIDGE UNBALANCE : 0.11% OF R.O.	<u>CONDUCTIVITY</u>
	ELEMENT TO SHIELD : 0Ω

DATE OF CALIBRATION : 12-Nov-20
TECHNICIAN : CHM

WIRING DIAGRAM

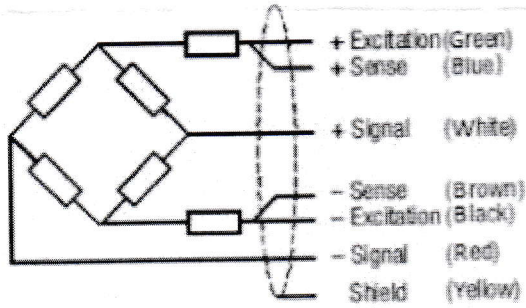

PRODUCED IN ACCORDANCE WITH DRAWING No. 2-14173